



فرست اتوماشن

Push Button

Series CZ0212



Prodcuts Features

- Two available Ex markings: Ex db ebIIC Gb / Ex ia IIC Ga.
- Ex ia module shall be used together with barrier.
- IECEx international certification, ATEX European certification.
- Two low temperature ratings for option -40°C/-55°C
- Signal lamp with button has contact 1NC or 1NO and signal lamp element inside.
- Wide voltage design, four voltage ratings for option
- Inside with temperature switch protection
- Long life LED light source
- Mounting: board front rail type (on rail or screw fixation)



فرست اوتوماشن

Push Button

Series CZ0212



Product Parameter

Product type:	Board front mounting rail type, board back type explosion-proof signal lamp with push button module
Certification:	CCC IECEx ATEX
Application range (zones):	2G/Gb/zone 1
Min.ambient temperature:	-55°C
Max.ambient temperature:	+60°C
Min.service temperature:	-55°C
Max.service temperature:	+90°C
Degree of protection:	IP20
Terminals:	2×2.5mm ²



فرست اتوماسیون

Push Button

Series CZ0212



Contact




info@first-automation.com.eg/ • 01101619222 – 01100200886 • <https://first-automation.com.eg/>



فرست اتوماشن

Push Button

Series CZ0212

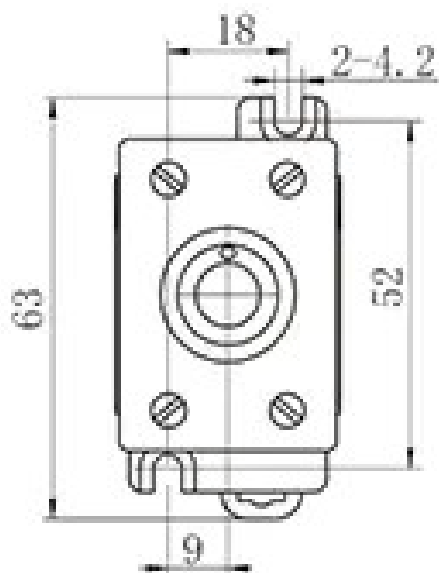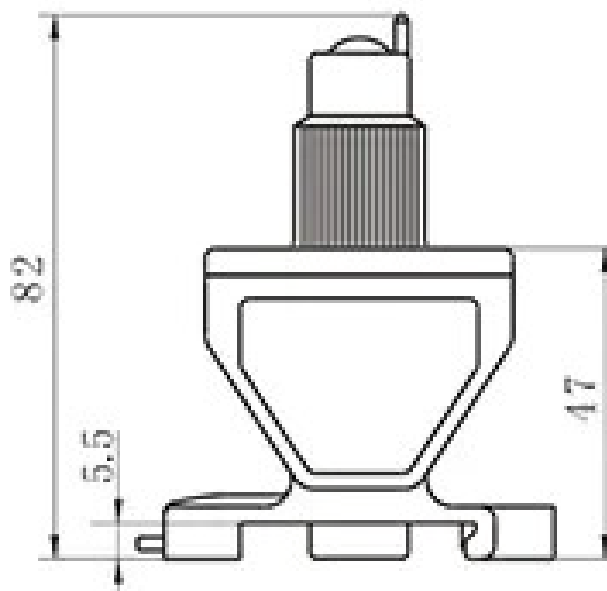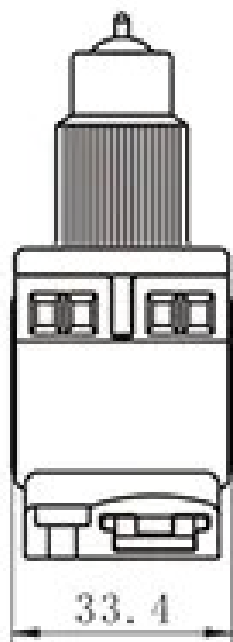




CZ0212 Board front mounting rail type



فرست اتوماشن

Push Button

Series CZ0212

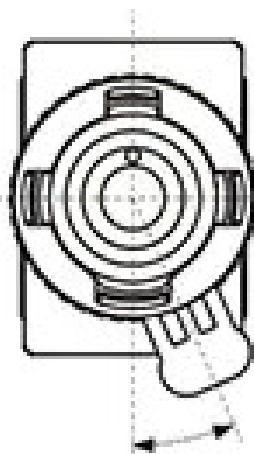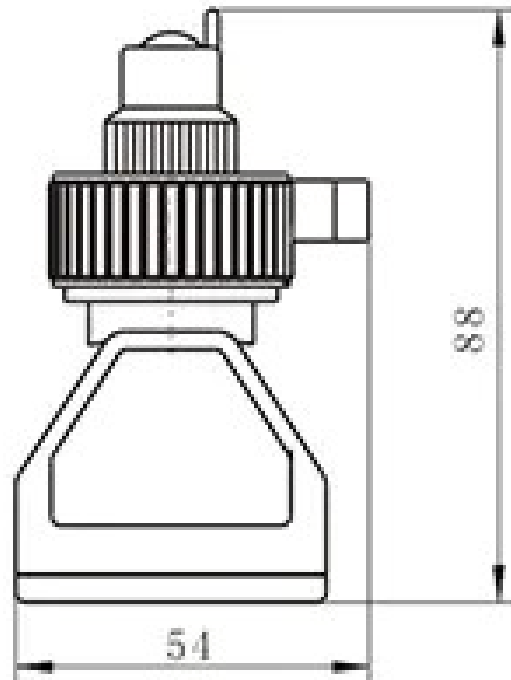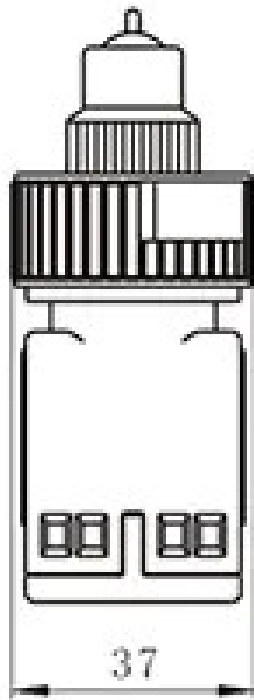

CZ0212 Board back type



فرست اتوماشن

Push Button

Series CZ0212



Illustration	Order No.
	CZ0212-□300H
	CZ0212-□303□
	CZ0212-□301□
	CZ0212-□304□
	CZ0212-□400H
	CZ0212-□403□
	CZ0212-□401□
	CZ0212-□404□
<p>6 — Board front mounting rail type 7 — Board back type</p>	<p>Mounting type</p>
<p>L — -40°C H — -55°C</p>	<p>Ambient temperature</p>